

Complete FPGA-based SmartNIC solution


on Savona (FB2CG) hardware from



SmartNIC (Smart Network Interface Card – NIC) is a specialized network adapter that **offloads certain processing tasks** from the host CPU to the NIC itself. These tasks can include **packet filtering, encryption/decryption, compression**, and other functions that are typically performed by software running on the host. By moving these tasks to the SmartNIC, it reduces the load on the host CPU, **increases network performance and significantly improves overall efficiency**. The **FPGA allows for flexibility** in terms of the specific tasks that can be performed, as well as the **ability to easily update or modify the SmartNIC's functionality** as needed.

How DYNANIC makes complete solution on Savona (FB2CG)?

Programming FPGA is not an easy task. DYNANIC **comes with the universal high-speed FPGA packet processing pipeline** for Savona (FB2CG). This pipeline consists of components required for various packet processing in many use-cases. And so DYNANIC **enables full utilization of FPGA-technology without prior FPGA knowledge!**

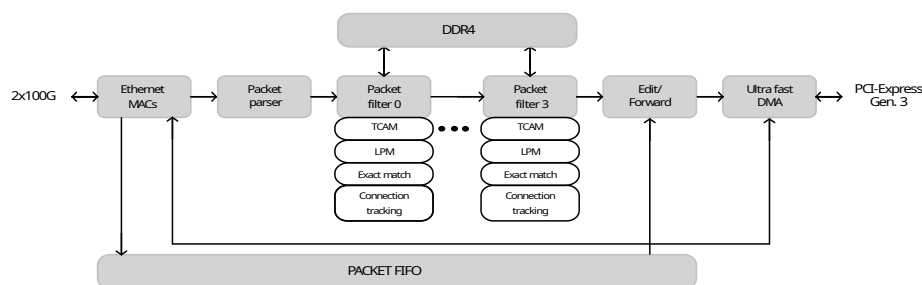

This wire-speed capable FPGA pipeline is **controlled from the host software** by standardized and open-source RTE Flow DPDK API. For example, to set up the filtration rule in the pipeline, it is only needed to write **a few lines of code in C++ or Python** programming language. So simple!

Use-cases with DYNANIC

Network acceleration

Examples of processing tasks that can be offloaded with DYNANIC include packet processing, encryption/decryption, compression/decompression or implementation and acceleration of future network protocols.

Network security

Example applications are firewall, intrusion detection and prevention systems (IDS/IPS), and DDoS mitigation (Anti-DDoS). All these can be offloaded with DYNANIC for improving performance and reducing latency.

Network monitoring and analyses

Troubleshooting network issues, detecting anomalies, and identifying performance bottlenecks with full wire-speed traffic capture in real time is possible thanks to DYNANIC.


Content delivery

DYNANIC can help applications for accelerating content caching and delivery, improving user experience and reducing server load in content delivery networks (CDNs).

Virtualized networking

Virtualized networking functions (NFV) such as virtual switches and routers improve performance and reduce latency using DYNANIC solution.

And many more . . .

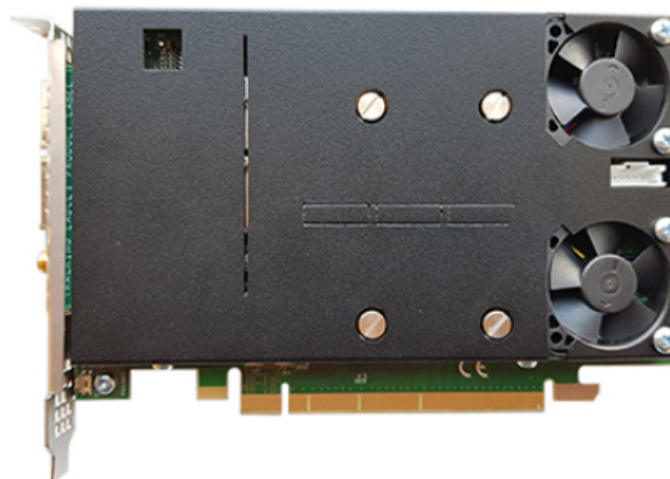


Savona (FB2CG) by Silicom.

Unique features of DYNANIC solution on Savona (FB2CG)

- ❑ **No need for FPGA** development, processing pipeline is given
- ❑ **Standardized and open-source** DPDK software stack
- ❑ **Processing pipeline controlled** by standard RTE Flow interface
- ❑ **Full 100 Gbps throughput** to and from host RAM
- ❑ **Configurable packet** parser supporting protocols from L2 to L4
- ❑ **Different filtering options utilizing** internal or external memories
- ❑ **Flow tracking** with fast atomic insert/removal from host
- ❑ **Solution ready** for different link speeds even on given card
- ❑ **Lossless traffic** processing at wire-speeds from 10G to 100G.

Link speed configuration	Exact match	LPM prefixes	TCAM rules
10/40 Gbps	0.5 M	0.25 M	6 k
100 Gbps	0.5 M	0.25 M	3 k

Achievable rule capacity for different filter types on **Savona (FB2CG)**. Values provided for IPv4 address matching. Exact match and LPM can be combined by sharing the capacity.

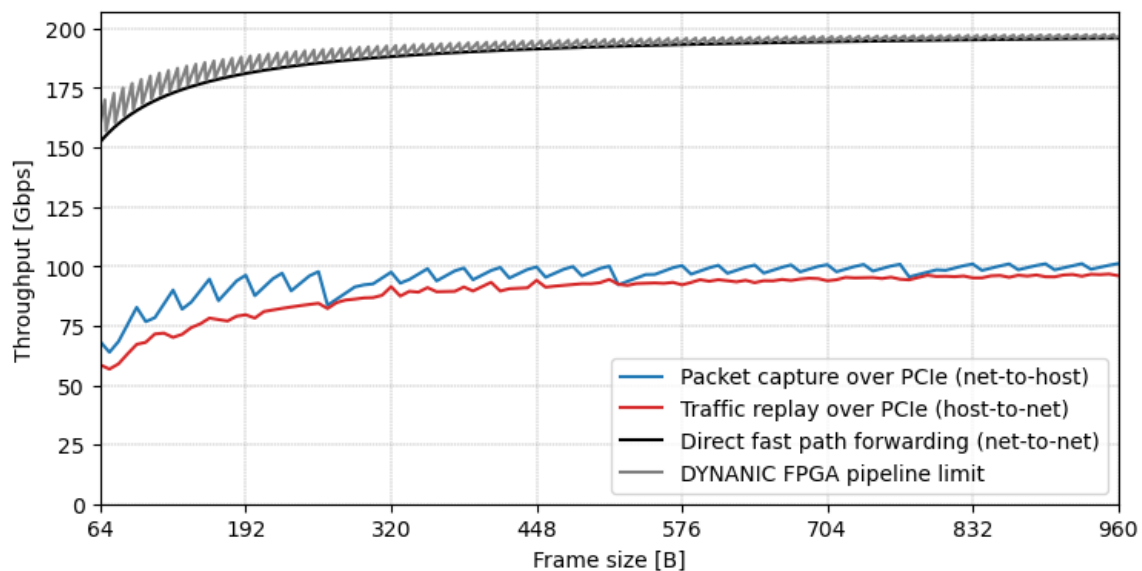

DYNANIC throughput measurements on **Savona (FB2CG)** with 2x100GbE and PCIe gen3. On-chip pipeline is calibrated for sustained wire-speed processing with a small margin on top. The only performance bottlenecks are introduced by the overhead of DPDK transfers over PCIe.

DYNANIC

DynaNIC Semiconductors Ltd. offers custom design and development services for FPGA-based projects. For more than 20 years our company team members specializing in the acceleration of algorithms required for high-speed network packet processing (e.g. packet parsing, packet/headers fields extraction, hash based pattern matching, filtering, traffic flow management, etc.) with link speeds up to 400 Gbps. Unique portfolio of IPs was also utilized to bring FPGA technology closer to any software company. That's how the flagship **DYNANIC** solution was created.



Silicom Ltd. is an industry-leading provider of high-performance networking and data infrastructure solutions. Designed primarily to improve performance and efficiency in Cloud and Data Center environments, Silicom's solutions increase throughput, decrease latency and boost the performance of servers and networking appliances, the infrastructure backbone that enables advanced Cloud architectures and leading technologies like NFV, SD-WAN and Cyber Security. Our innovative solutions for high-density networking, high-speed fabric switching, offloading and acceleration, which utilize a range of cutting-edge silicon technologies as well as FPGA-based solutions, are ideal for scaling-up and scaling-out cloud infrastructures.

How to start?

Contact Silicom to obtain Savona (FB2CG) at
[their website](#)

and visit

[DynaNIC website](#) to download working
package for Savona (FB2CG).